


AlphaMop™ MOPPING GUIDE

1. Use either a pre-wetted mop cover, or a dry mop cover wetted with an appropriate cleaning agent.
2. Slip the mop cover onto the mop.
3. For cleaning walls, clean from the top down.
 - a. Move from clean or dry areas to dirty or wet areas.
 - b. Use linear overlapping strokes, from top to bottom.
 - c. Change the mop cover every 25 cleaning steps – or more frequently if the wall is very dirty. A cleaning step is the cleaning of one mop width of a wall section, from top to bottom.
4. For cleaning floors, clean in small rectangular sections.
 - a. Move from clean or dry areas to dirty or wet areas.
 - b. Use linear overlapping strokes to minimize recontamination of mopped areas.
 - c. Mop doorways or high-traffic areas last as they are likely to be the dirtiest.
 - d. Doorways or high-traffic areas may need more frequent mopping or special attention to remove visible contamination.
 - e. Change the mop cover after 100 square feet (9.3 square meters) of floor surface has been mopped – or more frequently if the floor is very dirty.
5. Damp mopping is more effective than dry in removing contamination.
6. Place dirty mop covers in a bag for disposal.
7. Follow relevant site protocol (procedures for safety, contamination, etc.).

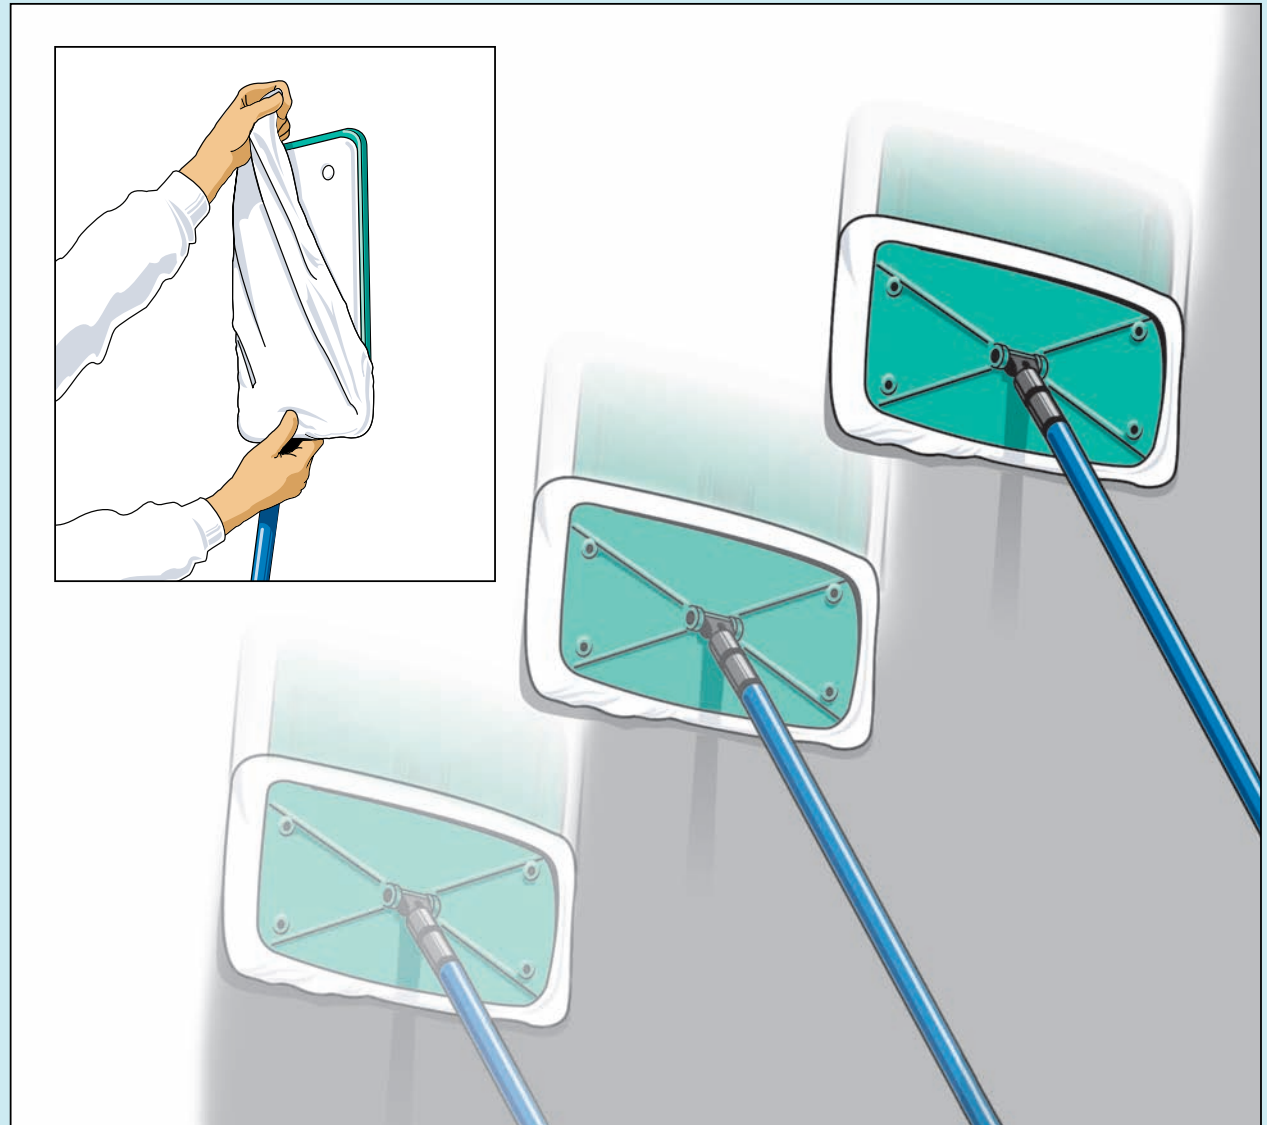

	North America	Europe	Asia
Tel	201 684 1800	+45 87 400 220	+65 6468 9433
Fax	201 684 1801	+45 87 400 222	+65 6468 6772
E-mail	info@texwipe.com	europa@texwipe.com	asia@texwipe.com

www.texwipe.com

TW Texwipe®